

Infrastructure

Social Housing

Aimed at both internal and external general lighting applications in the public and private sector, this fitting suits both traditional and contemporary environments. This robust bulkhead epitomises design simplicity and sets the standard for cost-effective, multi-application luminaires. As part of the timeless Trio range, the Cirlux has been used in a multitude of settings for over 25 years.

Applications

- Underpasses
- Car Parks
- Stairwells
- Railway stations
- Schools
- Industrial
- Corridors
- General Social Housing installations



Features

- Die-cast aluminium base
- Clear or opal UV stabilised fire retardant polycarbonate diffuser
- SA770 low smoke low toxicity silicone elastomer
- Diffuser secured to casing by stainless steel slotted screws with secret screw option
- IP65
- IK10++


Options

- Black, Grey or White
- Integrated 3hr emergency
- Dusk to Dawn
- Security screws included for added vandal resistance*

*Supplied in a separate bag. Security screwdriver WS7115 required.

CE BS.EN60598-2-1 IP65

Dimensions (mm)

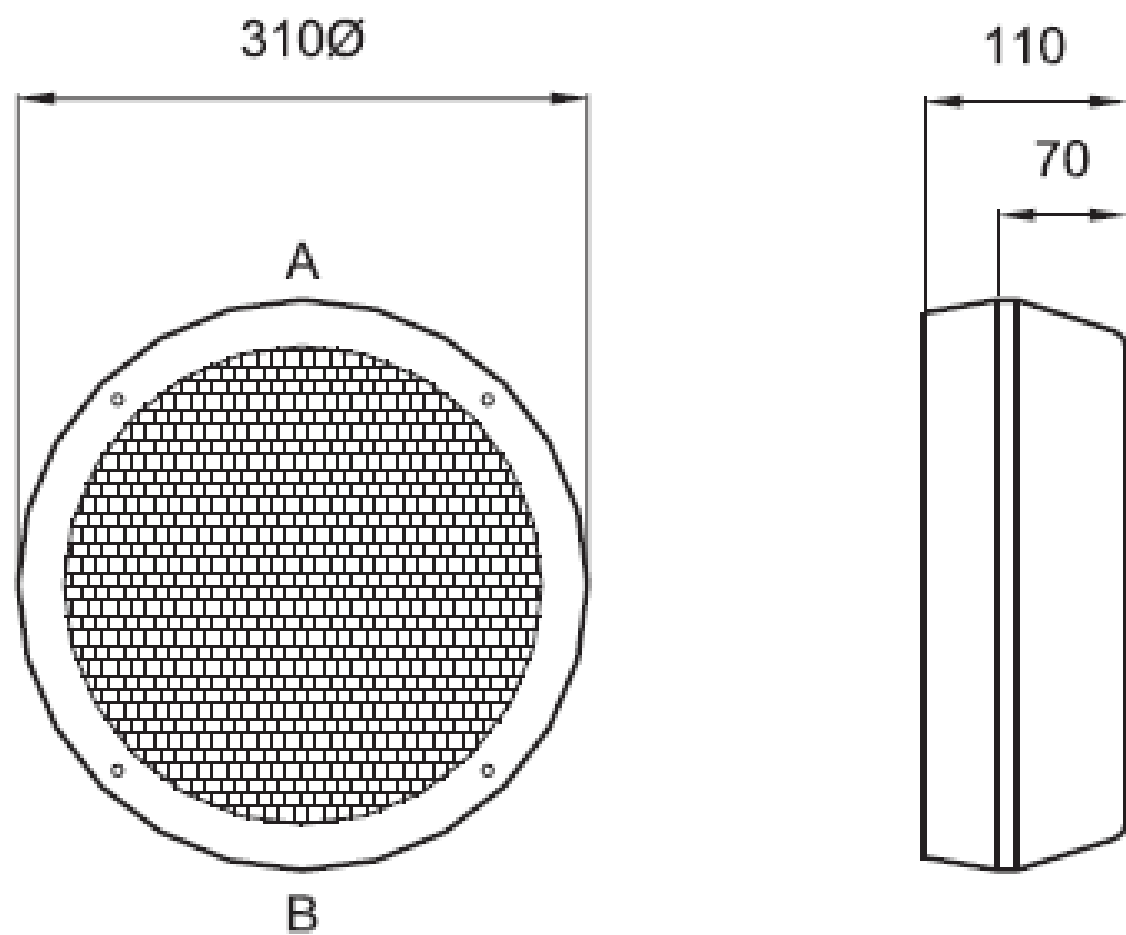

Lamp Types

16W 2D	CX.330-16
28W 2D	CX.330-28
38W 2D	CX.330-38
55W 2D	CX.330-55
2x11 W PLC	CX.330-211
2x18 W PLC	CX.330-218

Sample Order Code

CX.300-211	+	EMG	+	DD	/	W	/	OP
Luminaire		Emergency		Sensor		Finish		Diffuser
CX.300		Emergency = EMG		Dusk to Dawn = DD Microwave = MWD		Black = B Grey = G White = W		Clear = CL Opal = OP

CX.300-211+EMG+DD/W/OP = 2x11W, Emergency, Dusk to Dawn, White, Opal Diffuser

