

Quadlux, Fluorescent Coughtrie

Infrastructure

Social Housing

As part of the Trio range, the Quadlux is aimed at both internal and external general lighting applications in public and private settings. It is ideal for both traditional and contemporary environments and serves as a cost-effective, multi-application luminaire.

Applications

- Underpasses
- Stairwells
- Car Parks
- Railway stations
- Schools
- Corridors
- Industrial
- General Social Housing installations



Features

- Die-cast aluminium base
- Clear or opal UV stabilised fire retardant polycarbonate diffuser
- Diffuser secured to casing by stainless steel slotted screws with secret screw option
- SA770 low smoke low toxicity silicone elastomer
- IP65
- IK10++

Options


- Black, Grey or White
- Integrated 3hr emergency
- Microwave
- Dusk to Dawn
- Security screws included for added vandal resistance *

*Supplied in a separate bag. Security screwdriver WS7115 required.

CE BS.EN60598-2-1 IP65

Quadlux, Fluorescent Coughtrie

Dimensions (mm)

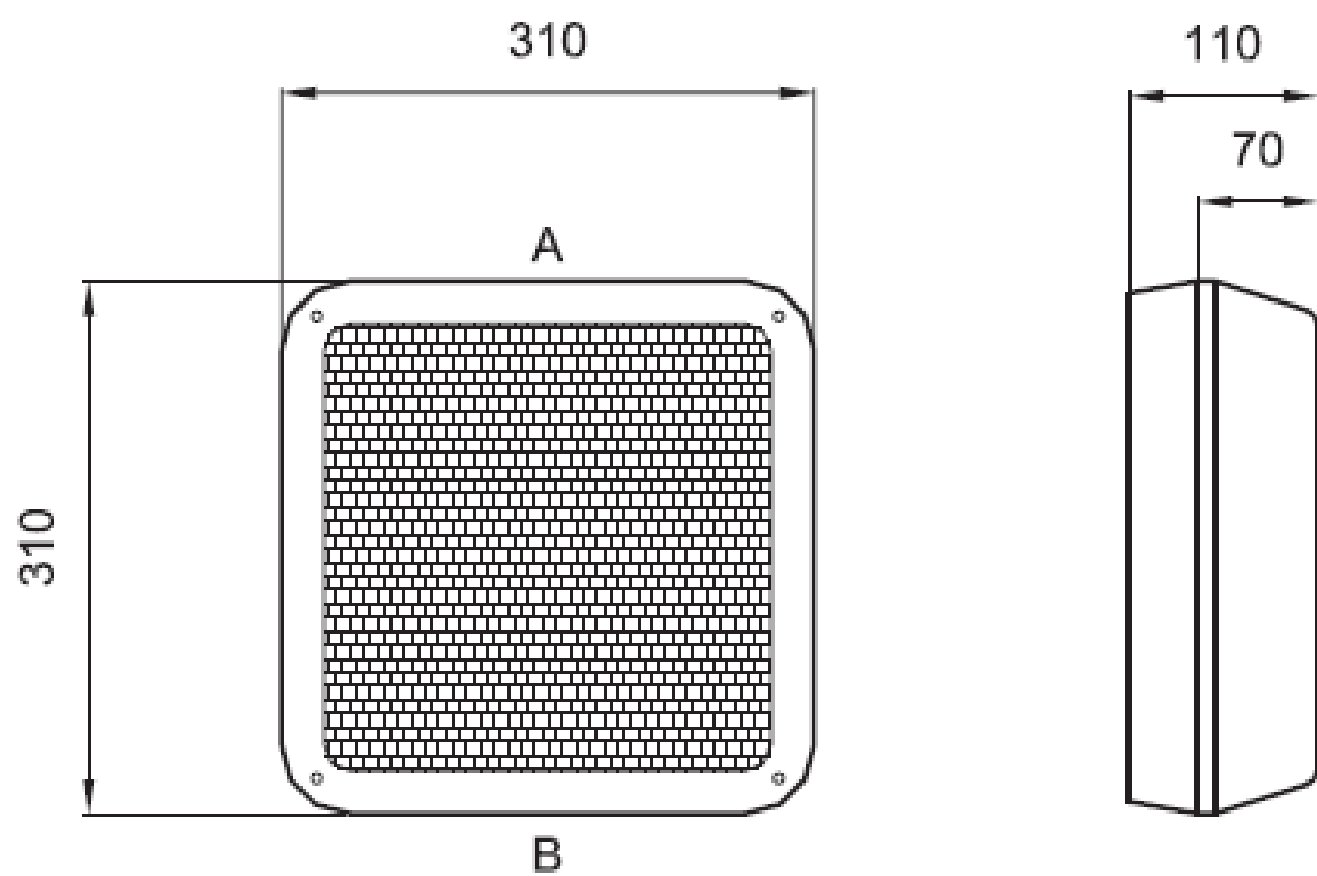

Lamp Types

| | |
|--------|-----------|
| 28W 2D | QX.330-28 |
| 38W 2D | QX.330-38 |

Sample Order Code

| | | | | | | | | |
|------------------|---|------------------|---|--------------------------------------|---|------------------------------------|---|-------------------------|
| QX.300-28 | + | EMG | + | MWD | / | G | / | OP |
| Luminaire | | Emergency | | Sensor | | Finish | | Diffuser |
| QX.300 | | Emergency = EMG | | Dusk to Dawn = DD Microwave = MWD | | Black = B Grey = G White = W | | Opal = OP Clear = CL |

QX.300-28+EMG+MWD/G/OP = 28W 2D, Emergency, Microwave, Grey, Opal Diffuser

CE BS.EN60598-2-1 IP65