

# SP 12W LED

# Coughtrie

Heritage

Interior

Rail

The most versatile fitting from our heritage portfolio. The SP is a classic, wall or ceiling mounted luminaire used for industrial and now retro/architectural applications. The fitting is section 12 approved for rail tunnel applications and is 1000hr salt spray test approved for marine applications.

## Applications

- Retro internal applications including pubs
- Marine
- Railway tunnels
- Outside coastal cottages
- Industrial and commercial properties



## Features

- Die-cast aluminium base and flange, pre-treated and polyester powder coated
- 20mm threaded AB entry and low smoke moulded nitrile sealing ring
- Clear or Pearl Glass
- IP65


## Options

- Antique Bronze, Black, Grey or White
- Any RAL colour POA
- Integrated 3hr emergency & optional self-test
- Motion sensors - on/off or on/dim (10%), daylight monitoring
- Dusk to Dawn
- Microwave
- Corridor Function + Daylight monitoring



CE BS.EN60598-2-1 IP65

## Technical Specifications

LUMINAIRE CHARACTERISTICS	
LEDs	Tridonic LLE ADV
DRIVER	Constant current
WORKING TEMP	-25°C to 50°C
EMERGENCY WORKING TEMP	-5°C to 50°C
SYSTEM LUMENS	1200lm
EFFICACY	127lm/W
CRI	>80
CCT	4000K
LIFETIME	50,000hrs
IP RATING	IP65
ELECTRICAL CHARACTERISTICS	
POWER	9.4W
VOLTAGE	23V
CURRENT	350mA

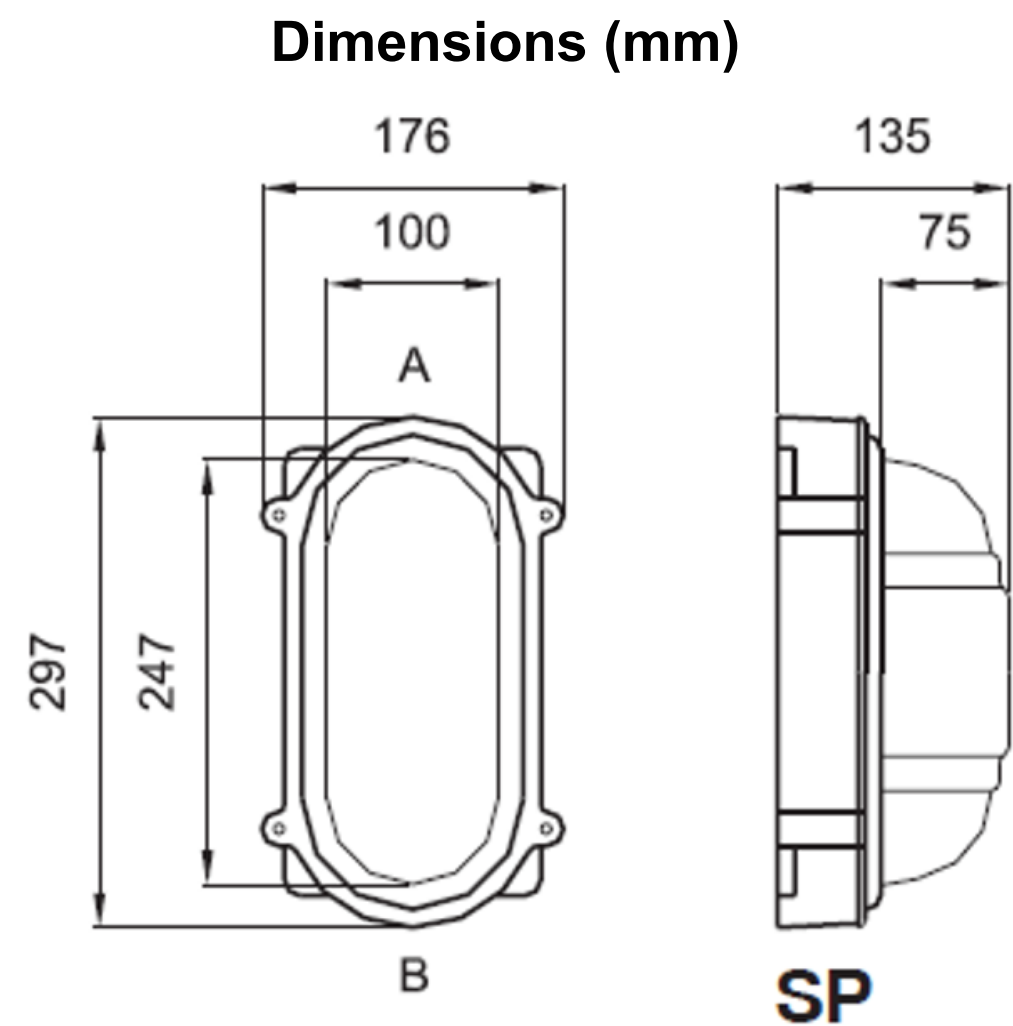

## Photometric Data

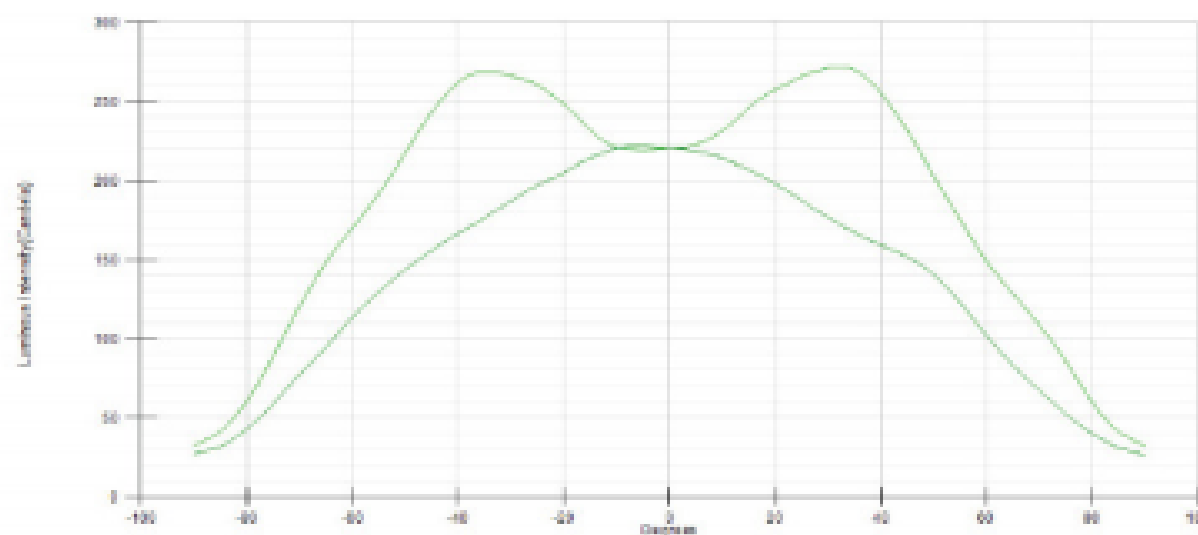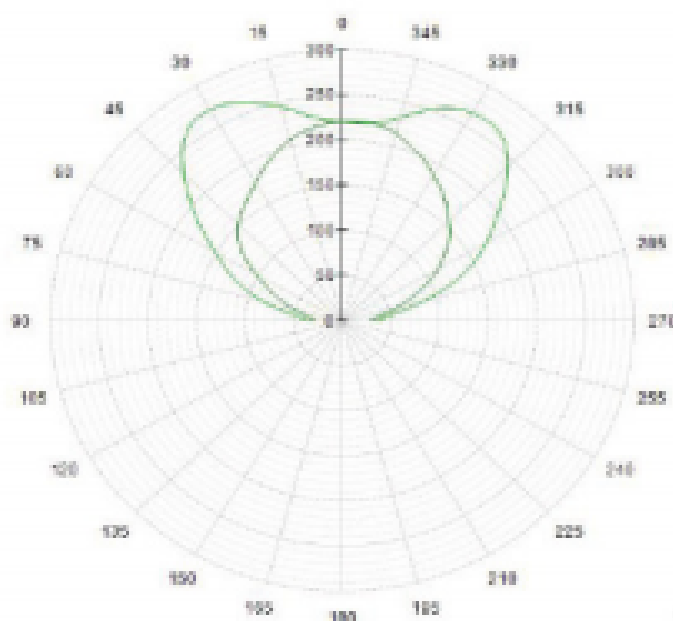

## Sample Order Code

SP-12LED	+	EMG	+	DD	/	B	/	CL
Luminaire		Emergency		Sensor		Finish		Diffuser
SP		Emergency = EMG		Dusk to Dawn = DD Corridor Function = CF CF+Daylight Monitoring = CFDM Microwave = MWD		Antique Bronze = BRONZE Black = B Grey = G White = W		Clear = CL Pearl = P

SP-12LED+EMG+DD/B/CL = 12WLED, Emergency, Dusk to Dawn, Black, Clear Glass Diffuser

