SP, Fluorescent



Heritage

Interior

Rail

The most versatile fitting from our heritage portfolio. The SP is a classic, wall or ceiling mounted luminaire used for industrial and now retro/architectural applications. The fitting is section 12 approved for rail tunnel applications and is 1000hr salt spray test approved for marine applications.

Applications

- Retro internal applications including pubs
- Marine
- Railway tunnels
- Outside coastal cottages
- Industrial and commercial properties



Features

- Die-cast aluminium base and flange, pre-treated and polyester powder coated
- 20mm threaded AB entry and low smoke moulded nitrile sealing ring
- Clear or Pearl Glass
- IP65

Options

- Antique Bronze, Black, Grey or White
- Any RAL colour POA
- Integrated 3hr emergency
- Dusk to Dawn
- Microwave






SP, Fluorescent



Dimensions (mm)

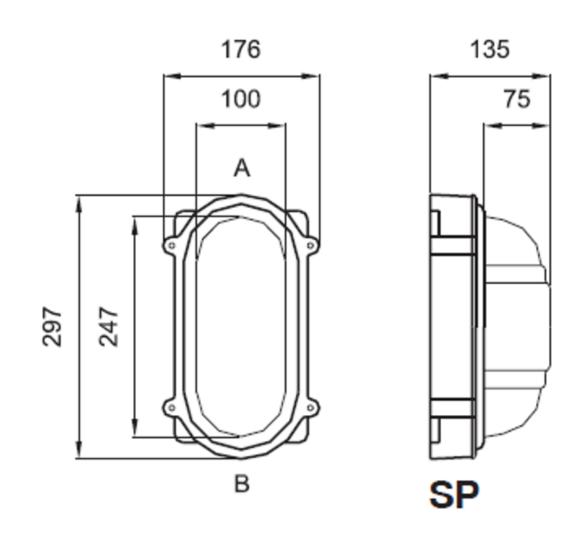

Sample Order Code

SP-126	+	DD	/	В	/	EHF	CL
Luminaire		Sensor		Finish		Gear	Diffuser
SP	N	Ousk to Dawn = DD Microwave = MWD Emergency = EMG		Antique Bronze = BRONZE Black = B Grey = G White = W		Eco-High Frequency = EHF	Clear = CL Pearl = P

SP-126+DD/B/EHF/CL = 1X26WPLC, Dusk to Dawn, Black, Eco-High Frequency Gear, Clear Glass Diffuser