
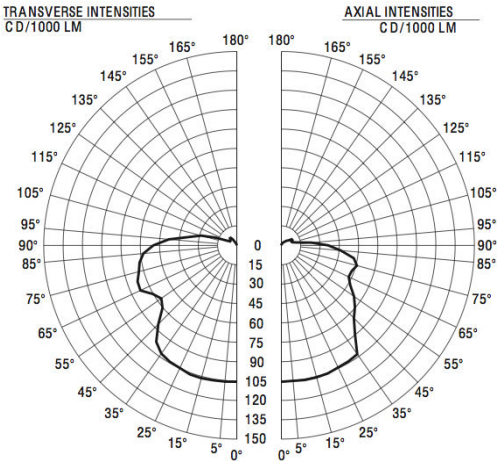


CBC 12W LED

CONSTRUCTION	
CASE	LM2 PRESSURE DIE CAST BODY
DIFFUSER	CLEAR PRISMATIC GLASS
GASKET	SA770 LOW SMOKE LOW TOXICITY SILICONE ELASTOMER
GEAR TRAY	FORMED ALUMINIUM
FINISH	SA210E INTERPON D36 POLYESTER POWDER COATING (TEST REF TSL0108)

LUMINAIRE CHARACTERISTICS	
LAMP	2 x 6W TRIDONIC LED BOARDS
WORKING TEMP	-25°C to 50°C
LUMENS	1400lm
CCT	4000K
VOLTAGE RANGE	110-240Vac
CRI	80
IP RATING	IP65
IK RATING	IK10++

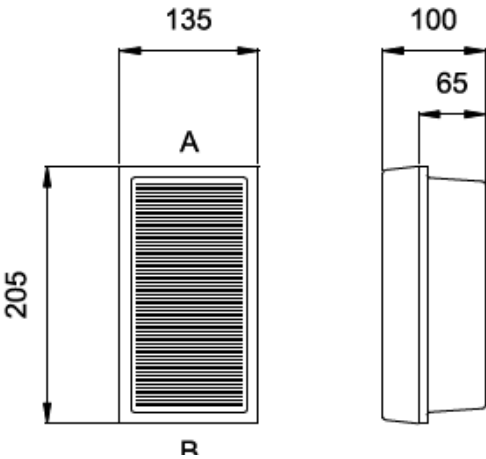

RR			Room Index									
F	C	W	0.75	1	1.25	1.5	2	2.5	3	4	5	
20	70	50	N/A	32	36	38	42	45	47	50	52	
		30	N/A	27	31	34	34	41	43	47	49	
		10	N/A	24	27	30	34	38	40	44	47	
20	50	50	N/A	30	33	36	39	42	44	46	48	
		30	N/A	26	29	32	36	38	41	44	46	
		10	N/A	23	26	28	32	35	38	41	44	
20	30	50	N/A	28	31	33	36	39	40	43	44	
		30	N/A	24	27	30	33	36	38	41	43	
		10	N/A	21	25	27	31	33	35	39	41	
00	00	00	N/A	19	22	24	27	30	31	34	36	
BZ Class			N/A	6	6	6	6	6	6	6	7	
SHR			ULORL					.08				
Nominal			1.75	DLORL					.49			
Maximum			1.81	LORL					.57			
Transverse			2.05	CIE Flux Code					33-57-80-85-57			
CB.10/B/CL/C+L						Clear Diffuser - 100W GLS						